

COOPER LIGHTING - METALUX®



CL SERIES

**1 or 2 Lamp
Specification
Grade T5 and T8**

UNDERCABINET SERIES

- Linear ribbed acrylic diffuser, 50% DR additive for pliability, non-yellowing, excellent light transmission, easily removed
- Durable baked white powder coat finish
- Heavy gauge cold rolled steel construction, no exposed fasteners, rounded corners ⁽¹⁾
- Designed for easy installation and service, key hole slots for simple mounting
- Versatile T5 thin profile design, for those inconspicuous undercabinet applications ⁽²⁾
- Electronic ballasting, provides instant-on start with no lamp flickering
- A lifetime limited warranty/T5 electronic ballasted fixture only is available
- UL/CUL Listed. Suitable for damp locations.


DESCRIPTION

The Metalux Undercabinet fixture Series provides effective task and enhancement lighting solutions for any decor. This specification grade fluorescent undercabinet series incorporates the latest Energy Efficient Technology, T5 and T8 fluorescent lamps and available electronic ballasts, to efficiently improve the appearance and productivity of the illuminated environment.


The unique low profile design of the Metalux undercabinet series conforms to various applications such as kitchens, offices, study areas, displays, computer work centers and practically any undercounter installation where an inconspicuous light source is required.

DIMENSIONS

(T5)

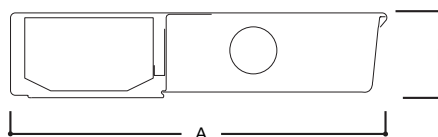

(T8)

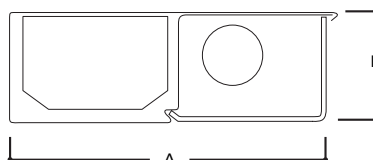

NOMINAL LENGTH	A	B
12", 21", 24", 33", 42" (T5)	5" (127mm)	1-1/16" (27mm)
18", 24", 36", 48" (T8)	5-1/8" (133mm)	1-13/16" (46mm)

ORDERING INFORMATION (T5)

SAMPLE NUMBER: CL-113T5-EB-120V-U

Housing Design Blank=Lens Front OF=Opaque Front SF=Solid Metal Front	Number of Lamps 1=12", 21", 33" Fixture 2=24", 42" Fixture (Not Included)	Wattage (Length) 08T5=8W T5 (12", 24") 13T5=13W T5 (21", 42") 0813T5=8W and 13W T5 (33")	Ballast Type EB=Electronic Ballast PH=Pre-Heat Ballast	Options (See Options Section)	Packaging U=Unit Pack
Series CL=Series			Voltage 120V=120 Volt		

ORDERING INFORMATION (T8)

SAMPLE NUMBER: CL-117-120V-EB81-U

Housing Design Leave Blank= Lensed Front (Standard) OF=Opaque Front	Number of Lamps 1=1 Lamp Only	Wattage (Length) 15=15W T8 (18") 17=17W T8 (24") 25=25W T8 (36") 32=32W T8 (48")	Starting Type LTS=Low Trigger Start (15W only) (120V only) HTS=High Trigger Start (15W only)	Ballast Type ⁽¹⁾ Blank=Standard Magnetic Ballast (15W only) EB8=T8 Electronic Instant Start. Total Harmonic Distortion < 10% No. of Ballast 1, 2 or 3 EB8+/PLUS=T8 Electronic Instant Start. High Ballast Factor >1.13. Total Harmonic Distortion < 20% No. of Ballast 1, 2 or 3 ER8=T8 Electronic Program Rapid Start. Total Harmonic Distortion < 10% No. of Ballast 1, 2 or 3 (For complete details on generic or to specify manufacturer's ballast see pg. 469)	Options (See Options Section)	Packaging U=Unit Pack
Series CL=Series		Voltage ⁽¹⁾ 120V=120 Volt 277V=277 Volt 347V=347 Volt UNV=Universal Voltage 120-277 ⁽²⁾	Options GL=Single Element Fuse GM=Double Element Fuse			

NOTES: ⁽¹⁾Products also available in non-US voltages and frequencies for international markets. ⁽²⁾Not available when specifying emergencies, voltage must be specific.
⁽³⁾Applies to T5 fixture type only.